

100

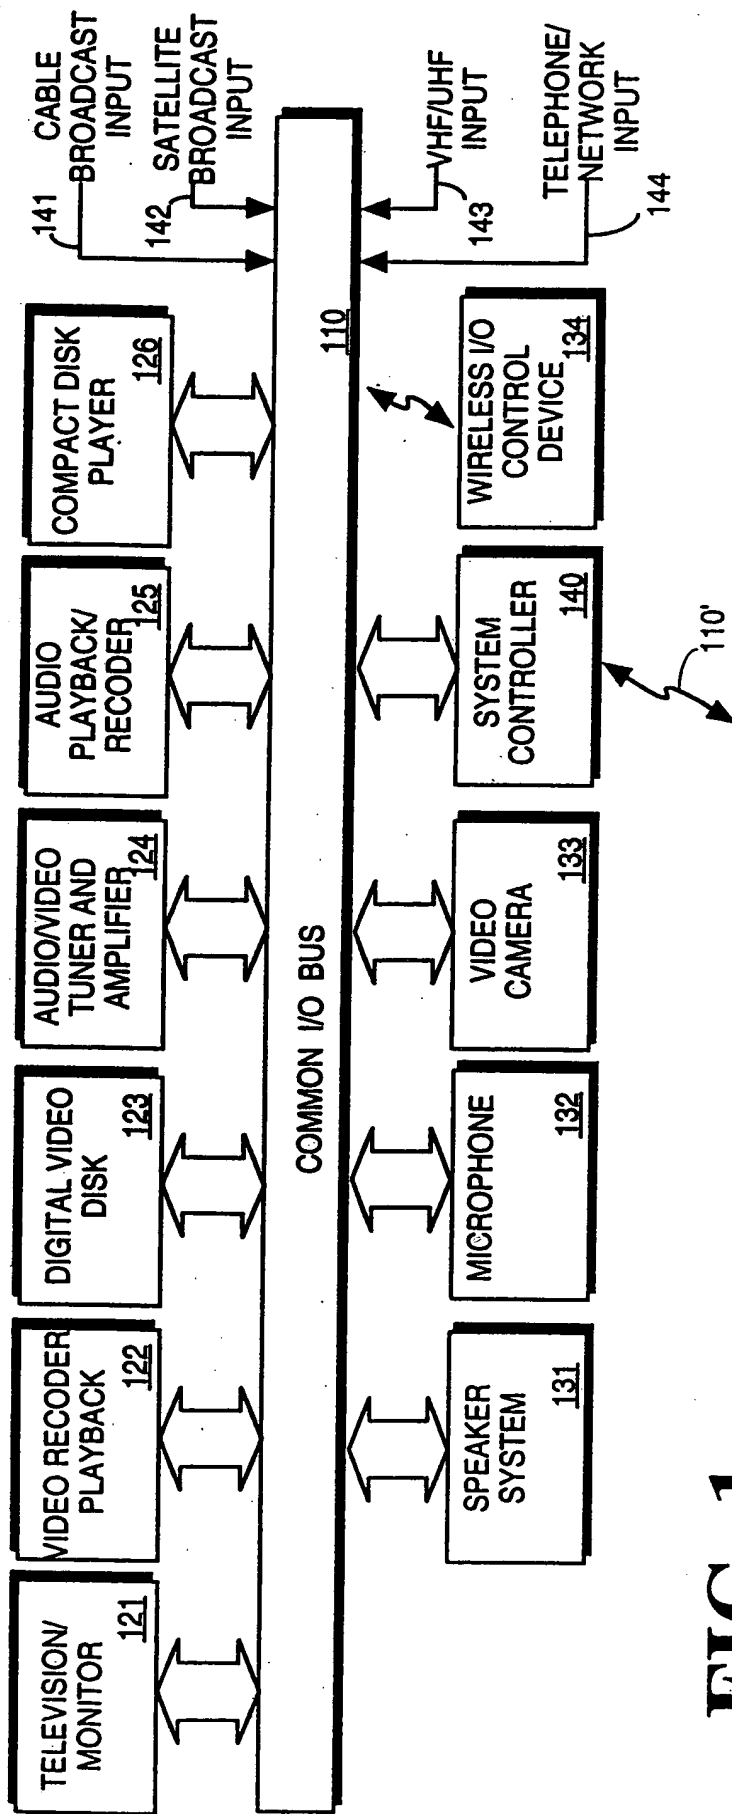


FIG. 1

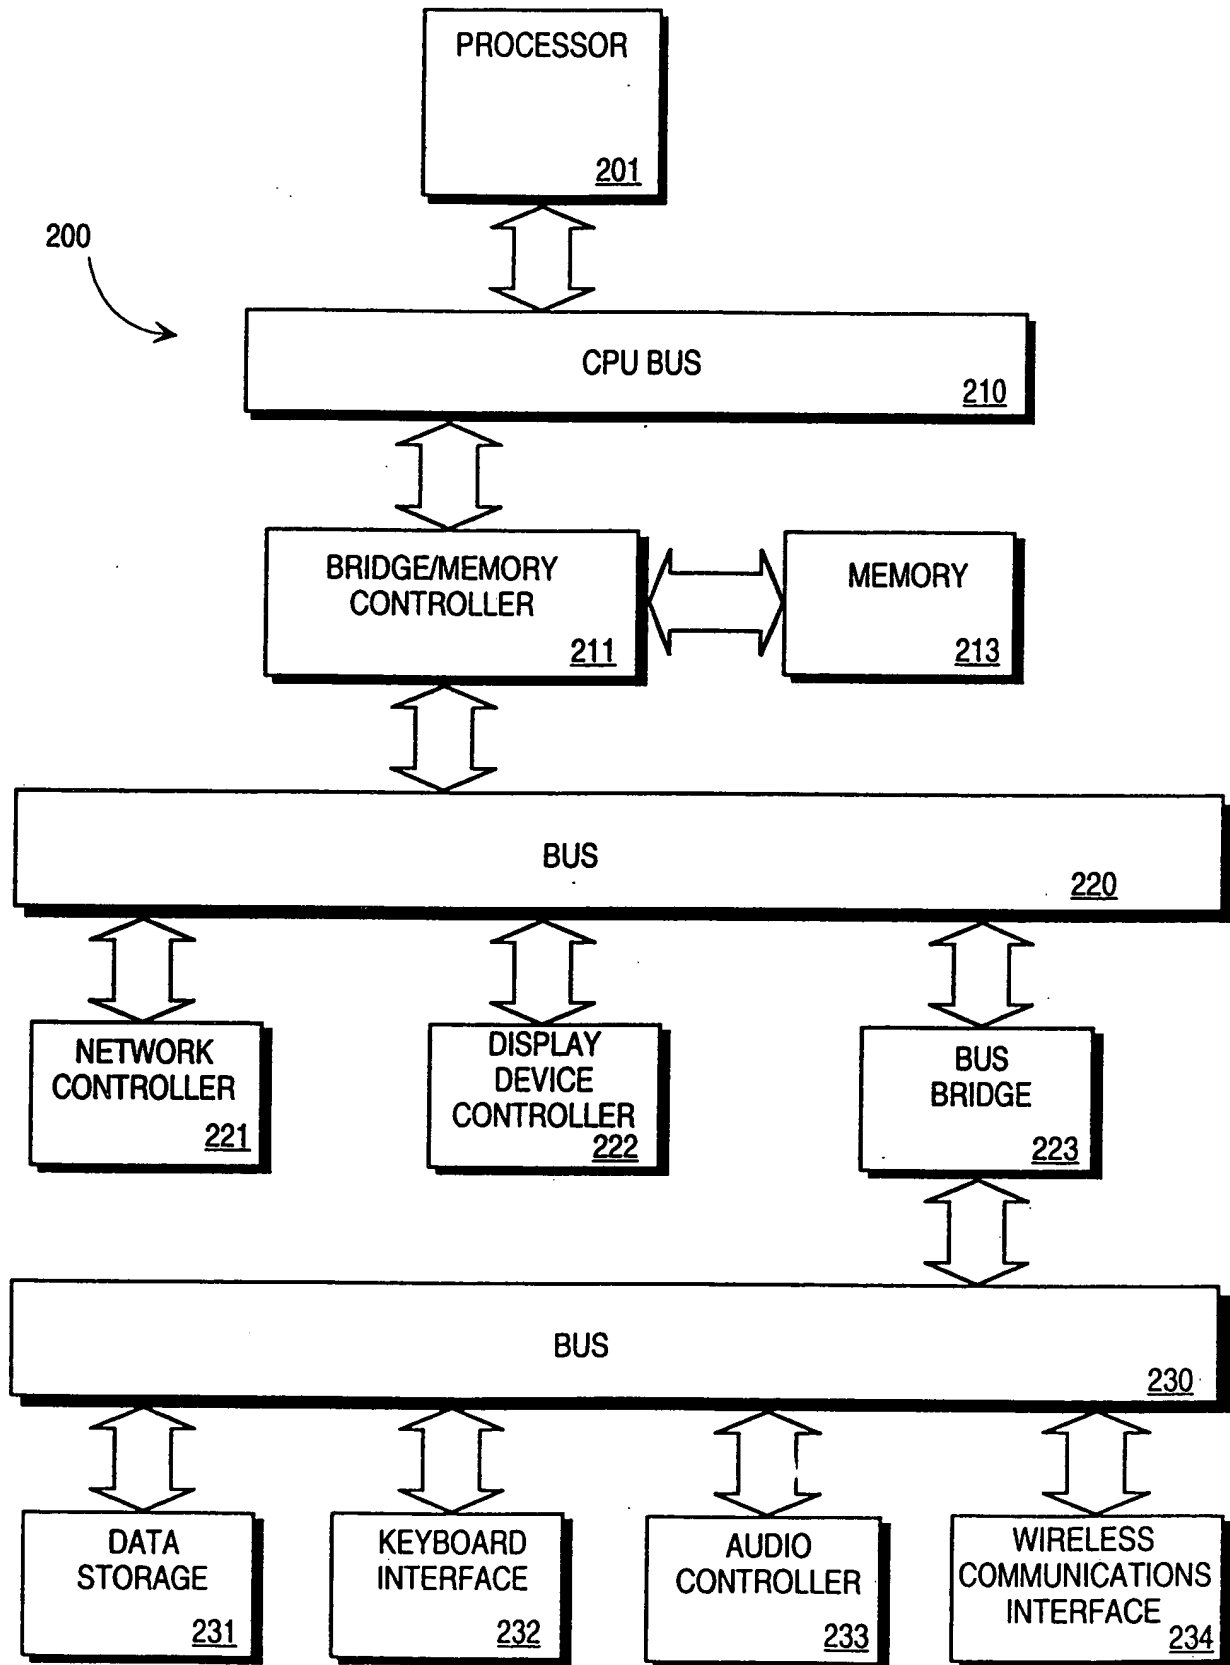


FIG. 2

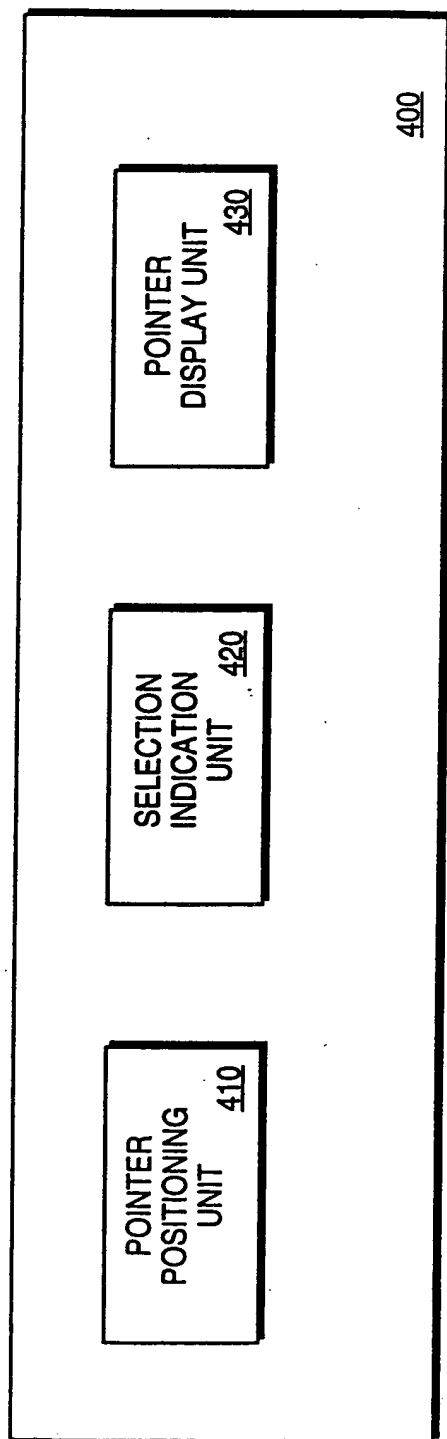


FIG. 4

FIG. 5a is a perspective view of a device 500. The device 500 includes a display 510, a touch sensor 520, a speaker 530, and a microphone 540. The device 500 is shown in a perspective view, highlighting its three-dimensional structure and the arrangement of its components.

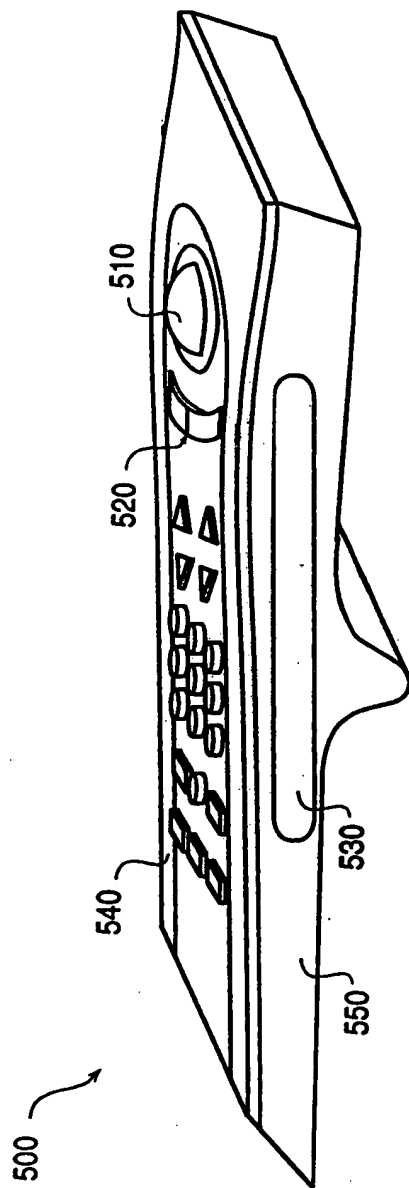


FIG. 5a

FIG. 5b is a schematic diagram of a device 500 in a closed state. The device 500 includes a housing 530 and a display 575. The display 575 is located on the front surface of the housing 530. The device 500 is shown in a closed state, with the display 575 being a single, continuous rectangular area. The housing 530 is a rectangular frame surrounding the display 575.

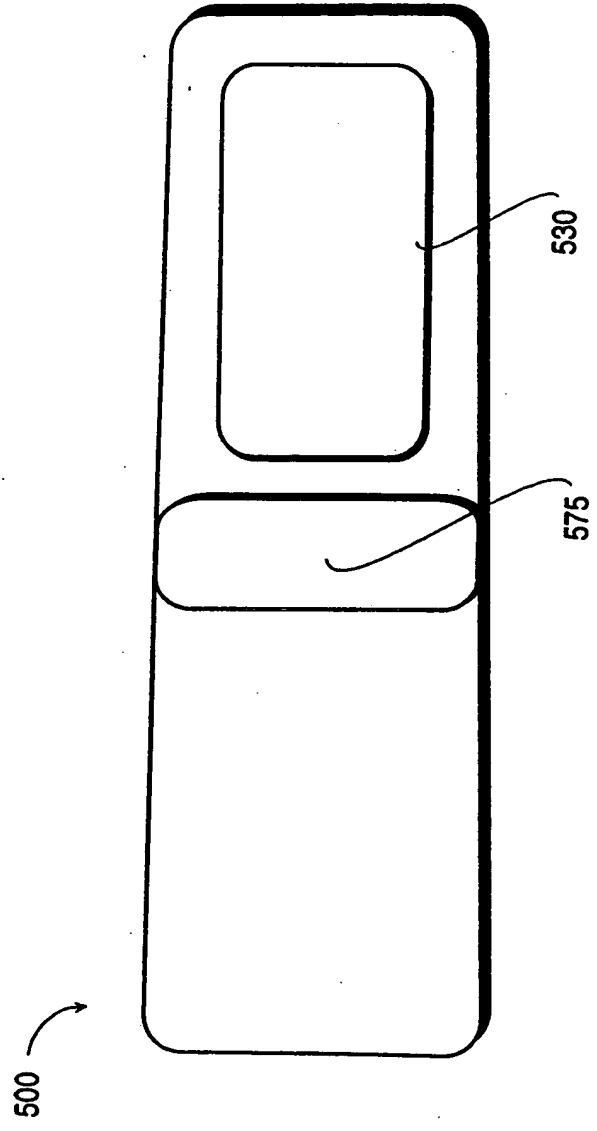


FIG. 5b

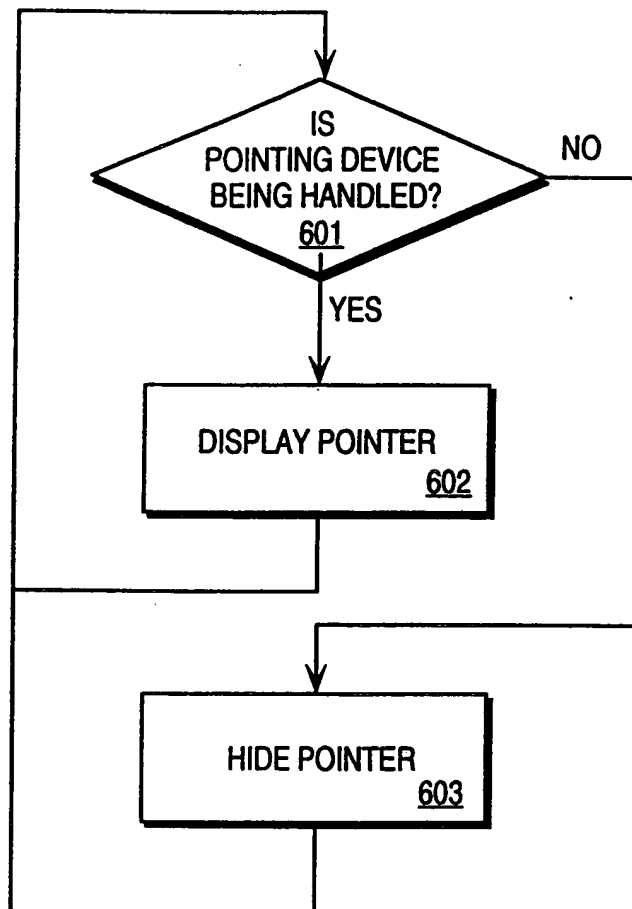


FIG. 6